FLOOR LOAD DUMPER

AUTOMATIC & SAFE TOTE AND CRATE UNLOADING



The Floor Load Dumper unloads bulk product containers from a forklift or pallet jack, improving production and efficiency of your food processing line without compromising safety. Continuous unloading minimizes product damage while keeping production running. Various configurations, safety factors, load heights, and options ensure the Floor Load Dumper can be seamlessly added to your process or integrated into your line.

- Single or 2-stage with 42-degree discharge angle
- Handle up to 1,800 pounds crates on standard model or 3,000 on the 5:1 safety factor design
- Optional positive seal system lifts and seals the box before tilt - eliminating possibility of debris
- Tubular frame design

COMMON FOOD APPLICATIONS











FRESH PRODUCE















SNACK FOOD

FLOOR LOAD DUMPER

FEATURES + SPECS


Key details to help you decide if the Floor Load Dumper is right for your operation.

- Hydraulic powered cylinders
- Single or 2-stage tilt
- 42-degree discharge angle
- Dumping Height: 61" (1549 mm)
- Bin Dimension: up to 42"x50"x50"
- Weight Capacity: 1,800 lbs. standard

OPTIONS

Additional equipment options to customize the Floor Load Dumper precisely to your application.

- Stainless steel or mild steel construction
- Wash down or RTE sanitation levels
- Positive seal system
- 3:1 or 5:1 safety factor
- Mounted or separate controls

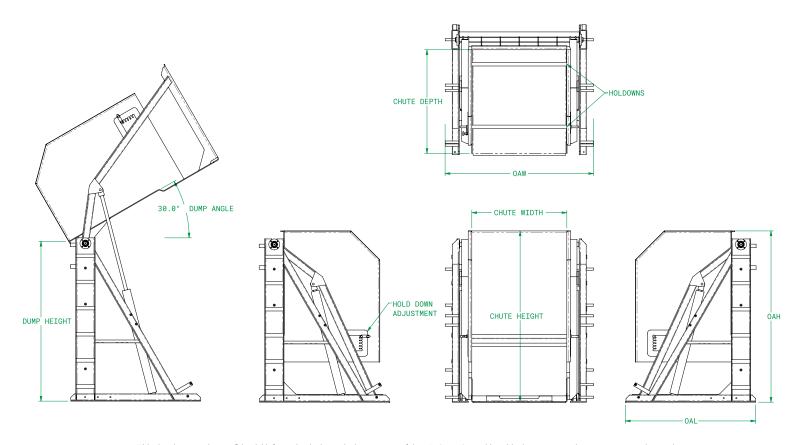

This drawing contains confidential information is the exclusive property of the J.E. Grote Co. Neither this document, nor its contents, are to be used, reproduced or disclosed in whole or in part without the express written permission of the J.E. Grote Co. Copyright 2022, J.E. Grote Company, Inc.

03.23v2

CONTACT US

Ready to get started on your configuration? Contact us to customize the Floor Load Dumper to your application, layout, and processes.

